

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 36 U.S.C. 371

VER-140XX

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/744134

INTERNATIONAL APPLICATION NO.

PCT/NL99/00468

INTERNATIONAL FILING DATE

20 July 1999

PRIORITY DATE CLAIMED

22 July 1998

TITLE OF INVENTION HYDROGENATION PROCESS

APPLICANT(S) FOR DO/EO/US Bernard Reesink, Willem Dijkstra, Pieter Berben and Marius Vaarkamp

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)) dated November 3, 2000.

Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment **with attached claims 1-13 from IPER dated 11/3/00**.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

Express Mail Number

4418428997US

U.S. APPLICATION (If known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO		ATTORNEY'S DOCKET NUMBER	
09/744134		PCT/NL99/00468		VER-140XX	

<p>17. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1,000.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00</p> <p style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</p> <p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:20%;">CLAIMS</th> <th style="width:20%;">NUMBER FILED</th> <th style="width:20%;">NUMBER EXTRA</th> <th style="width:20%;">RATE</th> <th style="width:20%;"></th> </tr> <tr> <td>Total claims</td> <td>16 - 20 =</td> <td>0</td> <td>X \$18.00</td> <td>\$ 0</td> </tr> <tr> <td>Independent claims</td> <td>3 - 3 =</td> <td>0</td> <td>X \$80.00</td> <td>\$ 0</td> </tr> <tr> <td colspan="4">MULTIPLE DEPENDENT CLAIM(S) (if applicable)</td> <td>+ \$270.00</td> </tr> </table> <p style="text-align: right;">TOTAL OF ABOVE CALCULATIONS =</p> <p><input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.</p> <p style="text-align: right;">SUBTOTAL =</p> <p>Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</p> <p style="text-align: right;">TOTAL NATIONAL FEE =</p> <p>Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property</p> <p style="text-align: right;">TOTAL FEES ENCLOSED =</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:60%;"></td> <td style="width:20%; text-align: center;">Amount to be refunded:</td> <td style="width:20%; text-align: center;">\$</td> </tr> <tr> <td></td> <td style="text-align: center;">charged:</td> <td style="text-align: center;">\$</td> </tr> </table>	CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		Total claims	16 - 20 =	0	X \$18.00	\$ 0	Independent claims	3 - 3 =	0	X \$80.00	\$ 0	MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00		Amount to be refunded:	\$		charged:	\$	<p>CALCULATIONS</p> <p style="text-align: right;">PTO USE ONLY</p>
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																								
Total claims	16 - 20 =	0	X \$18.00	\$ 0																							
Independent claims	3 - 3 =	0	X \$80.00	\$ 0																							
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$270.00																							
	Amount to be refunded:	\$																									
	charged:	\$																									

a. ☒ A check in the amount of \$ 860.00 to cover the above fees is enclosed. A check in the amount of \$ _____ is enclosed for the assignment recordation fee.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 23-0804. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

Customer Number 207

SEND ALL CORRESPONDENCE TO:

Weingarten, Schurgin, Gagnebin & Hayes LLP
Ten Post Office Square
Boston, Massachusetts 02109

Date: 1-19-1

SIGNATURE

Charles L. Gagnebin III

NAME

25,467

REGISTRATION NUMBER

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application : Bernard Reesink, et al.
 Application No. :
 Filed : Herewith
 For : HYDROGENATION PROCESS
 Examiner :
 Attorney's Docket : VER-140XX

Group Art Unit:

 I hereby certify that this correspondence is being deposited
 with the United States Postal Service as first class mail in an
 envelope addressed to: Assistant Commissioner for Patents,
 Washington, D.C. 20231 on _____.

By: _____

Registration No.
 Attorney for Applicant(s)

PRELIMINARY AMENDMENT

BOX PCT
 Assistant Commissioner for Patents
 Washington, D.C. 20231

Sir:

Submitted for examination is the attached English
 translation of the claims that were amended by the International
 Preliminary Examination Report dated November 3, 2000.

Kindly enter the following Preliminary Amendment in the
 above-identified application:

In the Amended Claims of the International Preliminary
Examination Report (attached) dated November 3, 2000:

Express Mail Number

9241842899705

Please amend the Claims as follows:

Claim 4, line 1, delete "-3";

Claim 7, line 1, delete "claims 1 or 3-6" and insert
--claim 1--;

Claim 8, line 1, delete "-7";

Claim 9, line 1, delete "claims 1-8" and insert
--claim 1--;

Claim 10, line 1, delete "claims 1-9" and insert
--claim 1--;

Claim 11, line 1, delete "claims 1-10" and insert
--claim 1--;

Claim 12, line 1, delete "claims 1-11" and insert
--claim 1--; and

Claim 13, line 1, delete "claims 1-12" and insert
--claim 1--.

Please add the following new claims 14 - 16:

- 1 14. Process according to claim 2, wherein the sulfur content of
- 2 the feedstock is less than 10 ppm.

1 15. Process according to claim 3, wherein the sulfur content of
2 the feedstock is less than 10 ppm.

1 16. Process according to claim 3, wherein:

2 the precious metal catalyst is a supported catalyst;

3 the support of the precious metal catalyst is selected from
4 silica, alumina, silica-alumina, titania, zirconia, zeolites,
5 carbon, clay materials and combinations thereof;

6 the precious metal content of the catalyst is between 0.01
7 and 5.0 wt.%, calculated on the weight of the catalyst;

8 the nickel catalyst is Raney nickel or a supported nickel
9 catalyst containing from 0.5 to 99 wt.% nickel;

10 the amount of precious metal catalyst ranges from 1 to 30
11 vol.% of the total system;

12 the weight ratio of nickel catalyst to metal oxide is
13 between 20:1 and 1:20;

14 the feedstock is selected from petroleum distillates,
15 resins and solvents.

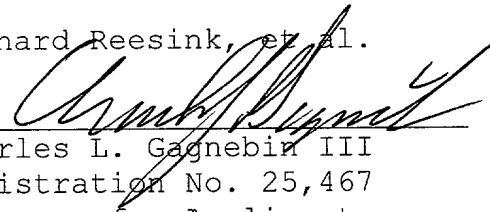
REMARKS

This Preliminary Amendment puts the claims into proper form for examination. Kindly calculate the filing fee based on the amended claims.

The Examiner is encouraged to telephone the undersigned attorney to discuss any matter which would expedite allowance of the present application.

Respectfully submitted,

Bernard Reesink, et al.

By: 
Charles L. Gagnebin III
Registration No. 25,467
Attorney for Applicants

WEINGARTEN, SCHURGIN, GAGNEBIN
& HAYES LLP
Ten Post Office Square
Boston, MA 02109
Telephone: (617) 542-2290
Telecopier: (617) 451-0313

Dated: 1-19-1

CLG:mes/241740-1

WO 00/05326

Title: Hydrogenation process

The invention relates to a process for hydrogenating a sulfur containing feedstock, such as resins, petroleum distillates, solvents and the like.

In hydrogenation often a problem presents itself in that the sulfur and/or sulfur components in the feedstock negatively affects the lifetime of the catalyst, especially of nickel catalysts. To avoid this problem much attention has been paid to the removal of sulfur compounds from the gaseous or liquid feedstock prior to the actual hydrogenation and/or dehydrogenation. Further, the presence of sulfur is quite often undesirable in view of the intended use of the hydrogenated material.

In general sulfur impurities are present in feedstocks as mercaptans or thiophenes, which can be hydrogenated to H_2S using a sulfidized Co-Mo catalyst. This method is also known as hydrodesulfurization (HDS). The H_2S formed may then, after separation and concentration, be processed to elemental sulfur in a conventional Claus process. This type of process is used for feedstocks containing large amounts of sulfur, i.e. more than about 0.1 wt.% of sulfur.

After conventional HDS treatment sulfur levels are usually in the range of about 500 ppm. Improved (or deep) HDS processes result in sulfur levels of about 50 ppm, whereas for further purified materials HDS processes have been developed resulting in sulfur contents after treatment of 10 ppm or less.

For some applications even these amounts of sulfur are still too high. In such a situation quite often use is made of a nickel catalyst. This catalyst has a dual function, as on the one hand the material is hydrogenated and on the other hand nickel reacts with the sulfur compounds. In the

course of time the nickel will deactivate, and finally will have to be replaced.

In EP-A 398,446 it has been proposed to use a hydrogenation or dehydrogenation catalyst based on at least one hydrogenation component and a metal oxide component, whereby the two components are present on a support as separate particles, preferably in absence of any direct contact between the metal oxide particles and the hydrogenation component particles.

This catalyst provides a good basis for the hydrogenation of various sulfur containing feedstocks. However, a disadvantage of this system resides therein, that the sulfur content of the feedstocks to be treated is limited, thus restricting the applicability.

In WO-A 9703150 a process is disclosed for the hydrogenation of sulfur containing feedstocks, wherein a feedstock having a sulfur content of preferably not more than 300 ppm is first contacted with a precious metal catalyst, followed by contact with a nickel catalyst. This process results therein that the deactivation of nickel is retarded considerably. This process shows a considerable advance in the art, however, for selected feedstocks and/or under specific circumstances further improvement has been considered desirable. More particular this system is suitable for light feeds, such as those that may be hydrogenated at temperatures below 200°C. For heavier feeds, requiring higher temperatures, this system is less suitable.

In the above process it may become a problem that the temperature window within which the process can operate efficiently is rather narrow. At low sulfur contents, quite often temperatures of over 200°C cannot be used effectively, although this would be advantageous in terms of hydrogenation activity.

It is a first object of the invention to provide a process for the hydrogenation of sulfur containing

feedstocks, having a widened temperature window, within which the process may be operated.

It is also an object to provide a process having a further improved tolerance for sulfur in the feedstock, i.e. which can have a longer life time before replacement becomes necessary. It is a further object to provide such a process wherein the deactivation of the catalyst system is retarded considerably.

It is also an object of the invention to provide a system that is very versatile in relation to the possibilities of regeneration and/or recovery of the catalyst components. Another object is to provide a system that may be used in situations where the sulfur content of the feedstock may fluctuate.

The invention is based on the discovery that the combined use of a precious metal catalyst, a nickel catalyst and a metal oxide results in an improved process, especially with respect to the objects stated above. It was found that especially at very low sulfur levels in feedstocks the effectivity of the removal of H_2S by nickel deteriorates.

The invention provides a process for the hydrogenation of a sulfur containing feedstock, having a sulfur content of less than 50 ppm, wherein the feedstock is hydrogenated in the presence of a precious metal catalyst and a nickel-catalyst, said process being carried out in such a manner, that

- the feedstock is contacted with a mixture of precious metal catalyst, metal oxide and nickel catalyst,
- the feedstock is contacted initially with the precious metal catalyst followed by contact with the metal oxide and nickel catalyst, either in combination or sequentially, or
- the feedstock is contacted first with a mixture of precious metal catalyst and metal oxide, followed by contact with the nickel catalyst.

In the broadest sense the process of the invention can be performed by the combined use of all three components,

wherein the precious metal will always be used at the start. In preferred embodiments the feedstock will first be hydrogenated using a precious metal catalyst, which is followed either by separate absorption (with metal oxide) and
5 hydrogenation (with nickel) steps, or by a combined hydrogenation-adsorption step. It is, however, also possible to hydrogenate the feedstock using a combination (mixture) of precious metal and metal oxide, followed by nickel. This embodiment is not preferred, as it is more difficult to
10 recover the precious metal catalyst.

It has been found that the present approach to hydrogenating hydrocarbon feedstocks that may contain varying amounts of sulfur impurities, provides a further improvement of the known systems. More in particular it has been found
15 that this process has a high resistance against catalyst deactivation, especially for the treatment of heavy feedstocks, as the system remains stable and useful at higher hydrogenation temperatures, such as over 200°C.

Further the system is highly suitable for the removal
20 of the last traces of sulfur, i.e. at level far below 10 ppm sulfur, for example 1 ppm or less. Conventional systems based on nickel do not result in sufficiently optimal economics of the process.

In the present invention various hydrocarbon
25 feedstocks may be used. Preferred are petroleum distillates, resins, solvents and the like. It is possible to use these feedstocks directly, but it is also possible to use the product from a previous hydrosulfurisation process, i.e. a feedstock having a sulfur content reduced by deep HDS to less
30 than 50 ppm. Surprisingly it has also been found that the system provides advantageous results in case of very low sulfur contents, i.e. below about 10 ppm.

The feedstock is hydrogenated over a conventional precious metal catalyst. Generally these are supported
35 precious metal catalysts, containing from 0.01 to 5.0 wt.%, precious metal calculated on the weight of the catalyst.

Preferred amounts are between 0.1 and 2 wt %. The precious metals that may be used are platinum, palladium, rhodium, ruthenium, iridium and alloys thereof, such as platinum-palladium.

5 As support suitable supports for precious metal catalysts may be used, such as ceramic materials. Examples are silica, alumina, silica-alumina, titania, zirconia, zeolites, carbon, clay materials, combinations thereof and the like.

10 The metal of the metal oxide component will generally be selected from those metals that react with hydrogen sulfide to give stable metal sulfides. An enumeration of suitable metals has been given in the cited EP-A 398,446. Examples are silver, lanthanum, antimony, bismuth, cadmium,
15 lead, tin, vanadium, calcium, strontium, barium, cobalt, copper, tungsten, zinc, molybdenum, manganese and iron. Preferred metals are zinc and manganese.

 As indicated above, there are various possibilities for carrying out the present invention. With respect to all
20 embodiments it is to be noted that the steps can be carried out in separate reactors and/or in separate beds of the same reactor(s).

 The hydrogenation of the feedstock over a nickel catalyst may be done using any nickel hydrogenation catalyst,
25 such as Raney nickel or a supported nickel catalyst. Under the reaction conditions, the nickel will be mainly in the metallic form. The nickel content may range from as low as 0.5 wt.% to 99 wt.%. A preferred range is from 5 to 70 wt.%, calculated on the total weight of the reduced catalyst.
30 Suitable support materials are the same as for the precious metal catalyst.

 The skilled person can easily determine the relative amounts of the various components, depending on the various circumstances, such as sulfur content, type of feedstock and
35 reactor configuration. As a guideline it can be indicated that of the total system (supported precious metal catalyst,

nickel catalyst and metal oxide), the amount of precious metal catalyst is preferably between 1 and 30 vol.%. Of the remainder of the system, the weight ratio of nickel catalyst to metal oxide ranges preferably between 20:1 and 1:20. The weight ratio of nickel, calculated as metal, to metal oxide (not being nickel oxide) ranges preferably between 1:10 to 100:1; outside these ranges either the effect on the life time of the system becomes too small to be attractive, or the activity decreases to a level that is economically less interesting.

The above ranges give a general guidance, but variations can be made to optimise the performance of the system.

An important advantage of the present invention resides therein, that it can be implemented in existing plants, without prohibitively high investments. This is especially important for the use of the invention in hydrogenation of solvents. The invention provides the possibility to use existing reactor volumes in an optimal manner, thus reducing costs, while at the same time improving the performance of the system, including the life time of the catalyst, especially when higher conversions are required.

The process of the invention may be carried out at the temperature, pressure and other reaction conditions usually encountered in conventional hydrogenation processes of hydrocarbon feedstocks. Temperatures may accordingly range from 150 to 300°C; pressures can be from 10 to 250 bar; and LHSV, H₂ to feed ratio, and the like are as usual. The amounts of catalyst and metal oxide depend on the amount of unsaturation that has to be removed, on the amount of sulfur and on the other reaction conditions. The skilled person is aware of all these variables and can easily determine the optimal values for the process.

The invention is further elucidated on the basis of the examples, which are intended as exemplary only, without limiting the scope of the invention.

EXAMPLES

5 In a trickle bed process a heavy solvent, boiling range 180 - 300°C, containing 8 ppm sulfur was hydrogenated at 30 bar hydrogen pressure. The degree of conversion of aromatics was determined using UV-absorbance at 273 nm.

10 In a trickle bed reactor a mixture of a supported nickel catalyst and zinc-oxide extrudates was present, on top of which a layer of supported platinum/palladium catalyst was applied.

15 The nickel catalyst was a 57 wt.% nickel on silica, in the form of 3/64" extrudates. The zinc-oxide extrudates were also 3/64". The precious metal catalyst was an 1.2 wt.% Pt/Pd (weight ratio 1/3) on silica-alumina spheres.

The respective amounts of catalyst were such that in the precious metal the LHSV was 35 hr⁻¹ and in the mixture of nickel/zinc-oxide the LHSV was 10 hr⁻¹.

20 The reactor was operated in such a manner, that the decrease in the amount of aromatics in the product, due to deactivation, was kept constant by increasing the inlet temperature, until the maximum temperature of the reactor that can be used is reached (EOR: end of run temperature); in this case 275°C. The relation of sulfur dosage to the reactor and the inlet temperature required to meet the aromatics
25 specification, is a measure for the properties of the catalyst and the resistance against deactivation.

In the following table the temperature versus sulfur dosage of the system of the invention has been given.

Sulfur dosage (Kg S/M ³)	Temperature (°C)
1	165
2	183
3	198
4	207
5	216
6	223
7	228
8	230
9	232
10	238
12	241
14	254

PCT/NL99/00468

Int. pat. appln. no. PCT/NL99/00468
Our letter of October 20, 2000

ART 34 AMDT

EPO - DG 1

20 10 2000

(68)

Claims

1. Process for the hydrogenation of a sulfur containing feedstock, having a sulfur content of less than 50 ppm, wherein the feedstock is hydrogenated in the presence of a precious metal catalyst, the precious metal being selected from platinum, palladium, rhodium, ruthenium, iridium, osmium and alloys thereof, such as platinum-palladium, and a nickel-catalyst, said process being carried out in such a manner, that the feedstock is contacted initially with the precious metal catalyst followed by contact with a metal oxide and the nickel catalyst, either in combination or sequentially, and wherein the metal oxide has been selected from the oxides of silver, lanthanum, antimony, bismuth, cadmium, lead, tin, vanadium, calcium, strontium, barium, cobalt, copper, tungsten, zinc, molybdenum, manganese and iron.
2. Process for the hydrogenation of a sulfur containing feedstock, having a sulfur content of less than 50 ppm, wherein the feedstock is hydrogenated in the presence of a precious metal catalyst, the precious metal being selected from platinum, palladium, rhodium, ruthenium, iridium, osmium and alloys thereof, such as platinum-palladium, and a nickel-catalyst, said process comprising contacting the feedstock with a mixture of precious metal catalyst, metal oxide and nickel catalyst, the previous metal catalyst being a supported precious metal catalyst and the nickel catalyst being Raney nickel or a supported nickel catalyst, and wherein the metal oxide has been selected from the oxides of silver, lanthanum, antimony, bismuth, cadmium, lead, tin, vanadium, calcium, strontium, barium, cobalt, copper, tungsten, zinc, molybdenum, manganese and iron.

3. Process for the hydrogenation of a sulfur containing feedstock, having a sulfur content of less than 50 ppm, wherein the feedstock is hydrogenated in the presence of a precious metal catalyst, the precious metal being selected from platinum, palladium, rhodium, ruthenium, iridium, osmium and alloys thereof, such as platinum-palladium, and a nickel-catalyst, said process comprising contacting the feedstock first with a mixture of precious metal catalyst and metal oxide, followed by contact with the nickel catalyst, and wherein the metal oxide has been selected from the oxides of silver, lanthanum, antimony, bismuth, cadmium, lead, tin, vanadium, calcium, strontium, barium, cobalt, copper, tungsten, zinc, molybdenum, manganese and iron.
4. Process according to claim 1-3, wherein the sulfur content of the feedstock is less than 10 ppm.
5. Process according to claim 1, wherein the feedstock, after hydrogenation with the precious metal catalyst and before the hydrogenation with the nickel catalyst is contacted with the metal oxide.
6. Process according to claim 1, wherein the feedstock is simultaneously contacted with the metal oxide and the nickel catalyst.
7. Process according to claims 1 or 3-6, wherein the precious metal catalyst is a supported catalyst.
8. Process according to claim 1-7, wherein the support of the precious metal catalyst is selected from silica, alumina, silica-alumina, titania, zirconia, zeolites, carbon, clay materials and combinations thereof.
9. Process according to claims 1-8, wherein the precious metal content of the catalyst is between 0.01 and 5.0 wt.%, calculated on the weight of the catalyst.
10. Process according to claims 1-9, wherein the nickel catalyst is Raney nickel or a supported nickel catalyst containing from 0.5 to 99 wt.% nickel.
11. Process according to claims 1-10, wherein the amount of precious metal catalyst ranges from 1 to 30 vol. % of the total system.

New page 11

ART 34 AMDT

12. Process according to claims 1-11, wherein the weight ratio of nickel catalyst to metal oxide is between 20:1 and 1:20.

13. Process according to claims 1-12, wherein the feedstock is selected from petroleum distillates, resins and solvents.